
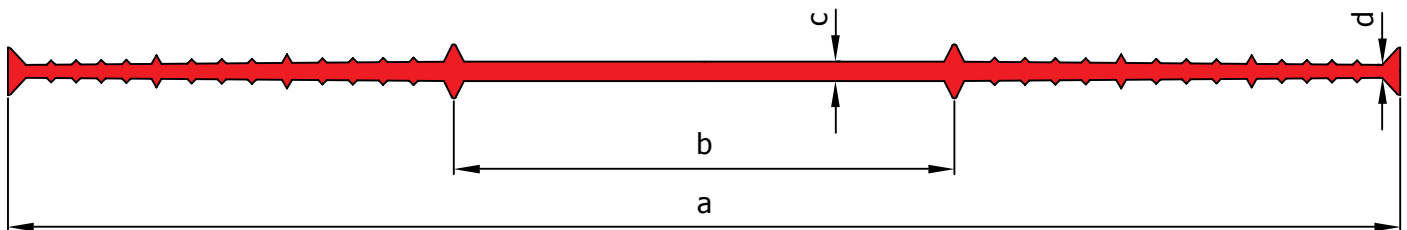


Internal construction joint belt - PVC-P to company standard NB

Sketch:

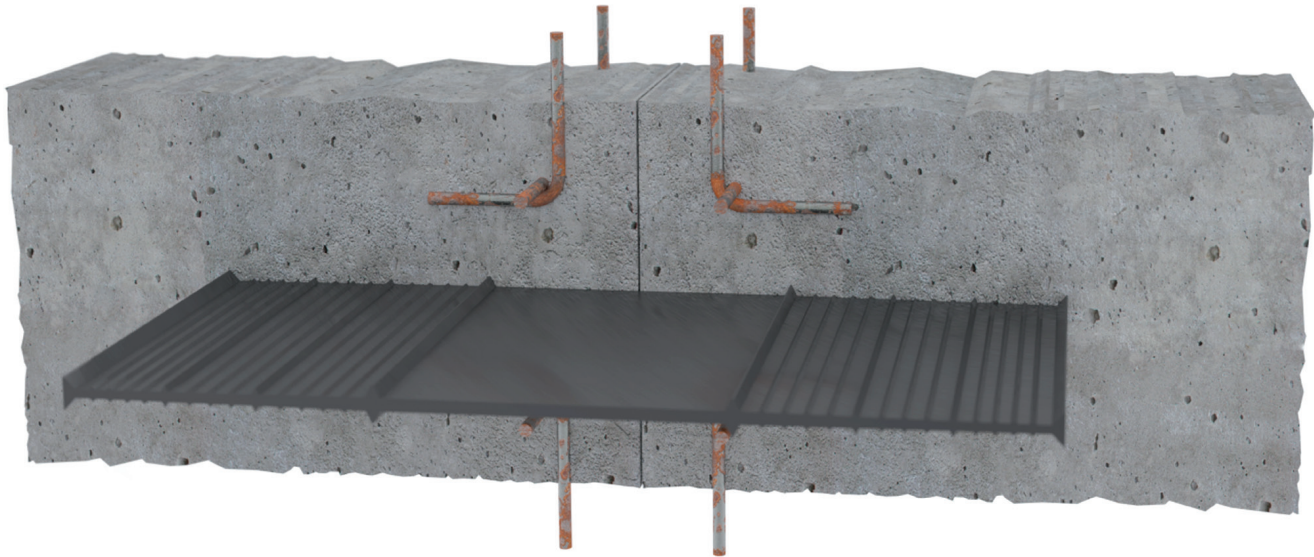

Type	Overall width a	Width of expansion element b	Thickness of expansion element c	Outside thickness d
A 10 NB	100	20	3	2,5
A 11 NB	110	25	3	2,5
A 15 NB	150	45	3	2,5
A 19 NB	190	70	3	2,5
A 24 NB	240	80	3,5	2,5
A 32 NB	320	100	4,5	3
A 50 NB	500	150	6	3,5

Article:	Internal construction joint belt - PVC-P to company standard NB packing = 25 m roll
Dimensions:	All dimensions are stated in mm. Joint belts to company standard are toleranced in accordance with DIN 16941.
Material:	PVC-P NB is not bitumen resistant, PVC-P BV bitumen resistant quality on request
Breaking elongation:	according to DIN EN ISO 527-2 at least $\geq 275\%$
Tensile strength:	according to DIN EN ISO 527-2 at least $\geq 10 \text{ N/mm}^2$
Shore hardness A:	according to DIN 53505: $72 \pm 5^\circ$
Technical change:	We reserve the right to make technical changes in the profile geometry and material composition in line with new findings.
Drawing/Sketch:	Illustration of the joint belts is only a sample for the profiles indicated in above table to exemplify handling possibilities. The correct application diversifies depending on local conditions. Due to this reason guarantee can not be taken over.